

talkfree box



Android / iOS / Tablet / Landline

User Manual

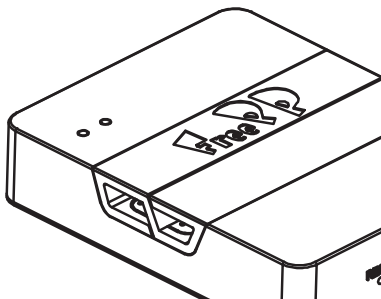


Table of contents

1	Product code	01
2	Product specifications	01
3	Hardware installation	
3-1	List of accessories	02
3-2	Installation diagram	03
4	How to install	05
5	Making free calls	06
6	FreePP APP download	06
7	Advanced setup	07
8	Check set up number	09
9	Reset to factory settings	10
10	Free calls after advanced setup	10
11	Calling non-FreePP users	13
12	Automatic software updates	13
13	Status description	14

1. Product code

The talkfree box ID is the default number of this device. Use it to make free calls right away.



2. Product specifications



Smart voice engine



Internet port : RJ-45



Powered by
Micro USB



Phone port : RJ-11



Weight : 100(g)



Size : 94x73x18 (mm)

3-1 Hardware installation

talkfree box



Network cable



Power adapter




USB cable



3-2 Installation diagram


Diagram 1:
DHCP enabled network connector.

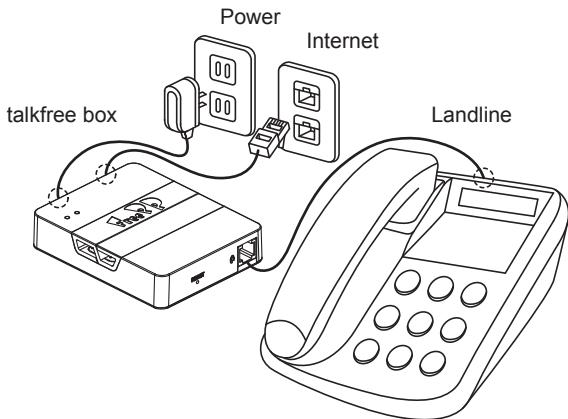

3-2 Installation diagram

Diagram 2:

For a network connector without DHCP, please connect the talkfree box to a DHCP enabled router.

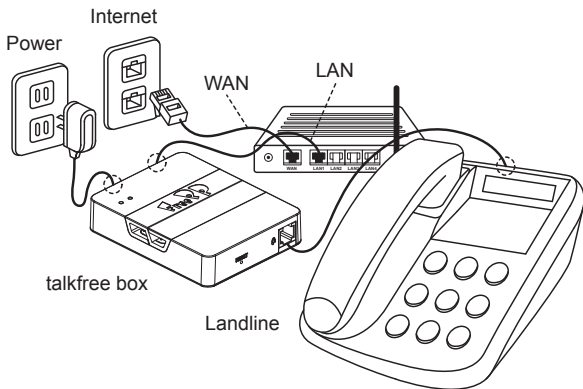


4. How to install?

The talkfree box cannot be connected to local telephone lines provided by regular telecoms such as AT&T, T-Mobile or else. Please connect your talkfree box to a separate telephone set.

Note: Call quality is subject to the quality of your internet connection. When making calls between the talkfree box and FreePP APP we recommend you use WiFi before 3G.

Calling between two talkfree boxes ensures the best quality possible.

Install in 3 Steps

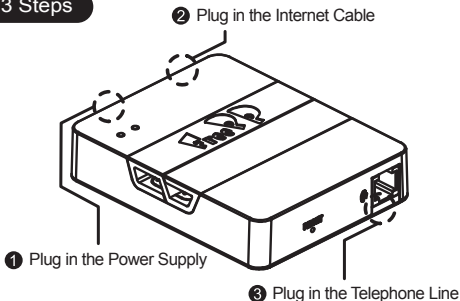

5. Making free calls

You can make free phone calls to any talkfree box ID or smartphone numbers that have downloaded our FreePP APP.

1. To call another talkfree box: Dial the ID number of the box you want to reach.
2. To call a mobile phone number (make sure the user has downloaded FreePP APP): Dial “00” or “+”-country code-mobile phone number.

6. FreePP APP download

You can download FreePP APP with the QR code below or visit our website (www.FreePP.com) for more information.



7. Advanced setup

Change the talkfree box ID number

No need for memorizing a new number. You can bind your talkfree box ID number to a landline or mobile phone number to keep things simple. To do that you will need a separate phone through which you will receive relevant instructions as well as verification after successfully completing the setup procedure.

Step 1: Enter command code

Binding to a landline phone number: Pick up your talkfree box phone and dial: **# 32 * 00, your country code, area code, phone number and #.**

The system will repeat the number you have entered. If correct, hang up your phone and wait for a call-back. If not successful, please make sure the number you enter is correct and repeat the process. Remember, the call-back will come to your non-talkfree box landline phone.

(For example: To bind to a landline number with a country code 886 (Taiwan), area code '03' and phone number '6001234', you should enter the following: # 32 * 0088636001234 #).

Binding to a mobile phone number: Pick up your talkfree box phone and dial: # 32 * 00, your country code, mobile phone number and #. The system will repeat the number you have entered. If correct, hang up your phone and wait for a call-back. If not successful, please make sure the number you enter is correct and repeat the process. Remember, the call-back will come to your mobile phone.

(For example: To bind to a mobile number with a country code 886 (Taiwan) and phone number 0988-123123, you should enter the following: # 32 * 00886988123123 #).

Note: If the number you wish to use is already registered with e.g. FreePP App, it is not possible to bind this number with your talkfree box.

Step 2: Entering the verification code

Enter **01** when you receive our call-back. This completes the setup operation.

If you do not receive a call-back from us, please make sure the number you enter is correct and repeat Step 1.

(Note: You can bind your talkfree box to another phone number by simply repeating Step 1 with your new number.)

8. Check set up number

1. Check the country code you set up

Pick up your talkfree box phone and dial **#*31#**.

The system will inform you of your current country code.

2. Check the landline or mobile phone number you set up.

Pick up your talkfree box phone and dial **#*32#**. The system will inform you of your current phone number.

9. Reset to factory settings

Press the “Reset” button for 5 seconds. The blue “Status” light will change to red flashing mode indicating a factory reset countdown. When the “Status” light turns blue again the factory reset has been successful.

10. Free calls after advanced setup


Call a FreePP number

To call a number with the same country code:
Dial area code+landline/mobile number.

To call a number with a different country code:
Dial “00” followed by country code+ area code+ landline/mobile number.


Same Country Code

To call a number with the same country code you don't need to dial the country code.

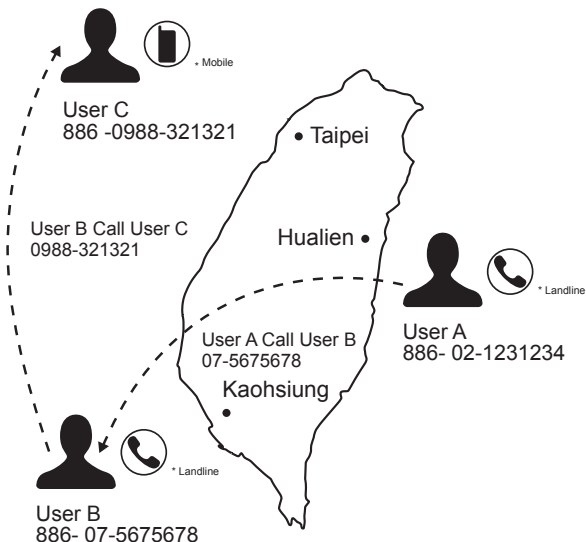

Different Country Code

To call a number with a different country code, you do need to dial the country code before the phone number itself.

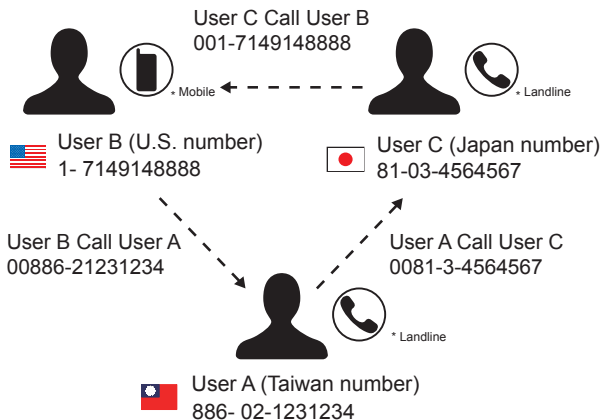

11. Calling non-FreePP users

FreePP works together with different carriers to provide you with more cost saving call options. Please visit us at our website www.FreePP.com (Buy Credit) for more details on calling non-FreePP users.

12. Automatic system updates

Talkfree box's software updates automatically. It is indicated by both blue and green indicator lights flashing. If you decide to pick up your talkfree box phone during that time you will hear "system upgrade". Please wait for approximately two minutes until the update is complete and the blue and green lights stop flashing.

13. talkfree box's status description

Indicated Status	"Power" indicator light	"Status" indicator light
Power on	Steady green light	
Detecting network connection	Steady green light	Red flashing light
No network connection	Steady green light	Steady red light
Connected to network	Steady green light	Steady blue light
System update	Flashing green light	Flashing red light

Please note that depending on your local network environment some time may be required for network detection. This generally takes 5-10 seconds.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



Browan Communications Inc.

Address: No.15-1 Zhonghua Road, Hsinchu Industrial Park,
Hukou, Hsinchu, Taiwan, 30352

Tel : +886-35981104 E-mail : customer@FreePP.com